

1390 REV. 5-93) US DEPT. OF COMMERCE PATENT & TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
110218

09/937626

**TRANSMITTAL LETTER TO THE
UNITED STATES
DESIGNATED/ELECTED OFFICE
(DO/EO/US) CONCERNING A FILING
UNDER 35 U.S.C. 371**

U.S. APPLICATION NO.
(if known, sec 37 C.F.R.1.5)INTERNATIONAL APPLICATION NO.
PCT/JP00/02175INTERNATIONAL FILING DATE
April 4, 2000PRIORITY DATE CLAIMED
April 12, 1999TITLE OF INVENTION
BLADE ATTACHING STRUCTURE OF WIPER UNITAPPLICANT(S) FOR DO/EO/US
Akira NAKAZAWA (formerly known as Akira HAYASHI), Yoshinori MASUDA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ Entitlement to small entity status is hereby asserted.
16. ☒ Other items or information: Request for Approval of Drawing Corrections

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.55) 09/937626	INTERNATIONAL APPLICATION NO. PCT/JP00/02175	ATTORNEY'S DOCKET NUMBER 110218
--	--	---------------------------------

17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	CALCULATIONS	PTO USE ONLY																
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">Claims</th> <th style="width: 20%;">Number Filed</th> <th style="width: 10%;">Number Extra</th> <th style="width: 10%;">Rate</th> </tr> <tr> <td>Total Claims</td> <td>17- 20 =</td> <td>0</td> <td>X \$ 18.00</td> </tr> <tr> <td>Independent Claims</td> <td>2- 3 =</td> <td>0</td> <td>X \$ 80.00</td> </tr> <tr> <td colspan="3">Multiple dependent claim(s) (if applicable)</td> <td>+ \$270.00</td> </tr> </table>	Claims	Number Filed	Number Extra	Rate	Total Claims	17- 20 =	0	X \$ 18.00	Independent Claims	2- 3 =	0	X \$ 80.00	Multiple dependent claim(s) (if applicable)			+ \$270.00	\$	
Claims	Number Filed	Number Extra	Rate															
Total Claims	17- 20 =	0	X \$ 18.00															
Independent Claims	2- 3 =	0	X \$ 80.00															
Multiple dependent claim(s) (if applicable)			+ \$270.00															
TOTAL OF ABOVE CALCULATIONS =	\$860.00																	
Reduction by 1/2 for filing by small entity, if applicable.	- \$																	
SUBTOTAL =	\$860.00																	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).	\$																	
TOTAL NATIONAL FEE =	\$860.00																	
	Amount to be refunded	\$																
	Charged	\$																

a. <input checked="" type="checkbox"/> Check No. <u>123224</u> in the amount of <u>\$860.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. <u>15-0461</u> . A duplicate copy of this sheet is enclosed.	<div style="text-align: center;"> NAME: James A. Oliff REGISTRATION NUMBER: 27,075 </div> <div style="text-align: center; margin-top: 20px;"> NAME: Scott M. Schulte REGISTRATION NUMBER: 44,325 </div>
--	---

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
 OLIFF & BERRIDGE, PLC
 P.O. Box 19928
 Alexandria, Virginia 22320

Date: September 27, 2001

09/937626

JC09 Rec'd PCT/PTO 27 SEP 2001
PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Akira NAKAZAWA (formerly known as Akira
HAYASHI), Yoshinori MASUDA,

Application No.: U.S. National Stage
of PCT/JP00/02175

Filed: September 27, 2001

Docket No.: 110218

For: BLADE ATTACHING STRUCTURE OF WIPER UNIT

PRELIMINARY AMENDMENT

Director of the U.S. Patent and Trademark Office
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE ABSTRACT:

Please replace the Abstract filed with the attached Abstract hereto.

IN THE SPECIFICATION:

Please replace the specification with the substitute specification attached herein.

IN THE CLAIMS:

Please replace claims 1-6 as follows:

1. A blade attaching structure of a wiper unit, comprising:

an attaching groove formed on a wiper arm; and

a connecting shaft provided on a blade for wiping a window surface, the
connecting shaft detachably and rotatably supported by the attaching groove, wherein the
attaching groove is provided with a groove inner portion having a larger diameter than the

09/937626-110218

connecting shaft and a groove entrance portion having a width narrower than the groove inner portion and postures of the attaching groove and the connecting shaft are changed between a connected posture where the connecting shaft is prevented from coming off from the groove entrance portion and attaching and detaching postures where the connecting shaft can freely enter or exit from the groove entrance portion.

2. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft is supported on the blade attaching structure to be slidable in a rotational direction of the shaft, the connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion due to a chamfered portion created on the outer circumference and changing postures are accomplished by operating an adjusting member integrally formed on the connecting shaft end portion to make the connecting shaft slide in the rotational direction of the shaft.

3. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft comprises a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed by externally fitting a cylindrical sliding portion having a chamfered portion formed on the outer circumference to a fixed shaft integrally fixed to the blade to be slidable in a rotational direction of the shaft and changing postures are accomplished based on the slide of the cylindrical sliding portion in the rotational direction of the shaft.

4. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft is integrally fixed to the blade, the connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed due to a chamfered portion created on the outer circumference and changing postures are accomplished based on changing the postures of the attaching groove by rotating the wiper arm with respect to the blade.

5. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft is attached to the blade, the connecting shaft having a concave groove on the outer circumference in the axial direction and the attaching and detaching postures enable free entrance and exit of the connecting shaft with respect to the groove inner portion by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the concave groove.

6. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the groove width of the groove entrance portion of the attaching groove is made smaller than the inner diameter of the groove inner portion, while the connecting shaft comprises a fixed shaft integrally fixed to the blade and a stopper pin for preventing the fixed shaft internally fitted to the groove inner portion from coming off at the groove entrance portion and the attaching groove and the connecting shaft are changed in posture based on attachment and detachment of the stopper pin.

Please add claims 7-17 as follows:

--7. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft is supported on the blade attaching structure to be slideable in a rotational direction of the shaft, the connecting shaft having a first diameter portion having the same diameter as the groove inner portion and a second diameter portion having a diameter less than the groove entrance portion and changing postures are accomplished by operating an adjusting member integrally formed on the connecting shaft end portion to make the connecting shaft slide in a rotational direction of the shaft.--

--8. The blade attaching structure of the wiper unit as set forth in claim 7, wherein the difference in diameter between the groove inner portion and the groove entrance portion is approximately half the difference between the first diameter portion and the second diameter portion.--

--9. The blade attaching structure of the wiper unit as set forth in claim 1, wherein the connecting shaft is attached to the blade, the connecting shaft having a concave groove on the outer circumference in the axial direction longer than a chord of the attaching groove, the attaching and detaching postures enabling free entrance and exit of the connecting shaft with respect to the groove inner portion produced by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the concave groove.--

-- 10. A method of attaching a blade to a wiper unit with a blade attaching structure comprising an attaching groove formed on a wiper arm and a connecting shaft provided on the blade, the method comprising the steps of:

moving the connecting shaft into the attaching groove where the connecting shaft can freely enter or exit from the attaching groove; and

changing a posture of the connecting shaft where the connecting shaft is prevented from coming off from the attaching portion, wherein the attaching groove is provided with a groove inner portion having a larger diameter than the connecting shaft and a groove entrance portion having a width narrower than the groove inner portion.--

--11. The method of claim 10, wherein the connecting shaft is supported on the blade attaching structure to be slidable in a rotational direction of the shaft, the connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion due to a chamfered portion created on the outer circumference and changing postures are accomplished by operating an adjusting member integrally formed on the connecting shaft end portion to make the connecting shaft slide in the rotational direction of the shaft. --

--12. The method of claim 10, wherein the connecting shaft comprises a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed by externally fitting a cylindrical sliding portion having a chamfered portion formed

on the outer circumference to a fixed shaft integrally fixed to the blade to be slidable in a rotational direction of the shaft, such that changing postures are accomplished by sliding the cylindrical sliding portion in the rotational direction of the shaft.--

--13. The method of claim 10, wherein the connecting shaft is integrally fixed to the blade, the connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed due to a chamfered portion created on the outer circumference, such that changing postures are accomplished by changing the postures of the attaching groove by rotating the wiper arm with respect to the blade.--

--14. The method of claim 10, wherein the connecting shaft is attached to the blade, the connecting shaft having a concave groove on the outer circumference in the axial direction, such that changing postures are accomplished by changing the postures of the attaching groove by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the concave groove.--

--15. The method of claim 10, wherein the groove width of the groove entrance portion of the attaching groove is made smaller than the inner diameter of the groove inner portion, while the connecting shaft comprises a fixed shaft integrally fixed to the blade and a stopper pin for preventing the fixed shaft internally fitted to the groove inner portion from coming off at the groove entrance portion, such that changing postures are accomplished by changing the postures of the attaching groove and the connecting shaft by attaching and detaching of the stopper pin.--

--16. The method of claim 10, wherein the connecting shaft is supported on the blade attaching structure to be slideable in a rotational direction of the shaft, the connecting shaft having a first diameter portion having the same diameter as the groove inner portion, and a second diameter portion having a diameter less than the groove entrance portion, such that changing postures are accomplished by operating an adjusting member integrally formed

on the connecting shaft end portion to make the connecting shaft slide in a rotational direction of the shaft.--

--17. The method of claim 10, wherein the connecting shaft is attached to the blade, the connecting shaft having a concave groove on the outer circumference in the axial direction longer than a chord of the attaching groove, such that changing postures are accomplished by changing the postures of the attaching groove by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the concave groove.--

REMARKS

Claims 1-17 are pending. By this Amendment, the specification and claims 1-6 have been amended and claims 7-17 have been added.

The attached Appendix includes marked-up copies of the Substitute Specification (37 C.F.R. §1.125(b)(2)) and claims (37 C.F.R. §1.121(c)(1)(ii)).


By the attached Substitute Specification, Applicants have amended the Specification. A marked-up copy of the original specification, in which deletions are indicated by strike-through and additions are indicated by underlining is also attached. The Substitute Specification places the application into idiomatic English and corrects minor informalities. No new matter is added by the substitute specification.

Prompt and favorable examination is respectfully requested.

09937626.110301

Should the Examiner believe anything further would be desirable to place this application in better condition for allowance, the Examiner is invited to contact Applicants' undersigned representative at the telephone number listed below.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Scott M. Schulte
Registration No. 44,325

JAO:SMS/sxb

Attachments:

Abstract
Appendix

Date: September 27, 2001

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

<p>DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461</p>
--

ABSTRACT

A blade attaching structure including a connecting shaft on a blade side detachably supported on an attaching groove formed on a wiper arm, wherein secure fixation becomes possible while attaching and detaching operations are simplified. An attaching groove formed on a wiper arm has a dovetail groove shape having a groove entrance portion with a groove width, the connecting shaft including a fixed shaft fixed on a bracket and a spacer having a cylinder sliding portion which is incorporated in the fixed shaft to be slidable in the rotational direction of the shaft. A chamfered portion is formed on the cylindrical sliding portion, a small diameter portion having a diameter which is the same as or smaller than the groove width is formed, and based on making the cylindrical sliding portion slide by operating a lever portion, the relationship between the attaching groove and connecting shaft is changed in posture to the attaching and detaching postures where the small diameter portion is opposed to the groove entrance portion and to the connected posture where the groove entrance portion is blocked.

APPENDIX

Changes to Abstract:

The following is a marked-up version of the amended Abstract.

A blade attaching structure including~~In a structure wherein~~ a connecting shaft J on a blade side ~~is detachably supported on an attaching groove formed on a wiper arm, wherein~~ secure fixation becomes possible while attaching and detaching operations are simplified. An attaching groove 3 formed on a wiper arm 1 has a dovetail groove shape having a groove entrance portion 3d with a groove width S, the connecting shaft J including~~comprises~~ a fixed shaft 8 fixed on a bracket 7 and a spacer 9 having a cylinder sliding portion 9b which is incorporated in the fixed shaft 8 so as to be slidable in the rotational direction of the shaft. A chamfered portion 9e is formed on the cylindrical sliding portion 9b, a small diameter portion having a diameter T which is the same as or smaller than the groove width S is formed, and based on making the cylindrical sliding portion 9b slide by operating a lever portion 9a, the relationship between the attaching groove 3 and connecting shaft J is changed in posture to the attaching and detaching postures where the small diameter portion is opposed to the groove entrance portion 3d and to the connected posture where the groove entrance portion 3d is blocked.

Changes to Specification:

A Substitute Specification is attached in accordance with 37 C.F.R. 1.125(b)(2).

Changes to Claims:

Claims 7-17 are added.

The following is a marked-up version of the amended claims:

- _____ 1. A blade attaching structure of a wiper unit, comprising:
_____ having an attaching groove formed on ~~the tip end of~~ a wiper arm; and

_____ a connecting shaft provided on a blade for wiping a window surface, ~~thesaid~~ connecting shaft detachably and rotatably supported by the attaching groove, wherein ~~thesaid~~ attaching groove is provided with a groove inner portion having a larger diameter than the connecting shaft and a groove entrance portion having a width narrower than the groove inner portion, and ~~wherein~~ the postures of the attaching groove and the connecting shaft are changed between the a connected posture where the connecting shaft is prevented from coming off from the groove entrance portion and the attaching and detaching postures where the connecting shaft can freely enter or exit from the groove entrance portion.

_____ 2. ~~The~~A blade attaching structure of ~~thea~~ wiper unit as set forth in ~~claim~~Claim 1, wherein

_____ the connecting shaft is supported on the blade attaching structure so as to be slidable in ~~at~~ the rotational direction of the shaft, the connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion due to a chamfered portion created on the outer circumference, and ~~wherein~~ changing postures are ~~accomplished~~ accomplished by operating an adjusting member integrally formed on the connecting shaft end portion to make the connecting shaft slide in the rotational direction of the shaft.

3. ~~The~~A blade attaching structure of ~~thea~~ wiper unit as set forth in ~~claim~~Claim 1, wherein the connecting shaft comprises a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed by externally fitting a cylindrical sliding portion having a chamfered portion formed on the outer circumference to a fixed shaft integrally fixed to the blade so as to be slidable in ~~at~~ the rotational direction of the shaft, and ~~wherein~~

changing postures are ~~accomplished~~ based on the slide of the cylindrical sliding portion in the rotational direction of the shaft.

____ 4. ~~The~~A blade attaching structure of ~~the~~a wiper unit as set forth in ~~claim~~Claim 1, wherein

_____the connecting shaft is integrally fixed to the blade, ~~the~~said connecting shaft having a larger diameter portion and a smaller diameter portion smaller than the larger diameter portion formed due to a chamfered portion created on the outer circumference; and ~~wherein~~ changing postures are ~~accomplished~~ based on changing the postures of the attaching groove by rotating the wiper arm with respect to the blade.

____ 5. ~~The~~A blade attaching structure of ~~the~~a wiper unit as set forth in ~~claim~~Claim 1, wherein the connecting shaft is attached to the blade, ~~the~~said connecting shaft having a ~~long~~-concave groove on the outer circumference in the axial direction; and ~~wherein~~ the attaching and detaching postures ~~enabling~~enable free entrance and exit of the connecting shaft with respect to the groove inner portion ~~is produced~~ by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the ~~said~~-concave groove.

____ 6. ~~The~~A blade attaching structure of ~~the~~a wiper unit as set forth in ~~claim~~Claim 1, wherein the groove width of the groove entrance portion of the attaching groove is made ~~slightly~~ smaller than the inner diameter of the groove inner portion, while the connecting shaft comprises a fixed shaft integrally fixed to the blade and a stopper pin for preventing the fixed shaft internally fitted to the groove inner portion; from coming off at the groove entrance portion; and the attaching groove and the connecting shaft are changed in posture based on attachment and detachment of the stopper pin.

14/PMTS

09/937626

JCO9 Rec'd PCT/PTO 27 SEP 2001

DESCRIPTION

BLADE ATTACHING STRUCTURE OF WIPER UNIT

Technical Field

The present invention belongs to the technical field of a blade attaching structure of a wiper unit which is mounted on vehicles such as automobiles, buses, and trucks.

Background Art

In general, this type of wiper unit is constructed by detachably attaching a blade on the front end of a wiper arm so that the blade can be replaced if necessary. As such attaching structures, there is, for example, a structure in that the groove width of a dent groove formed on the front end portion of the wiper arm is made into a so-called dovetail groove shape having a narrower width on the entrance side and a wider width on the inner side, while an attaching pin, which is set to a diameter approximately the same as the dimension of the groove inner side of the dent groove, is provided on a portion of the blade where the wiper arm is to be attached, and attachment is performed by fitting the dent groove onto the said attaching pin in a forcibly fitted manner.

However, in the above-described prior art, it is necessary to take measures so that the blade does not unexpectedly come off from the wiper arm, and for this purpose, a prevention against coming-off may be carried out by

reducing the dimension of the groove width at the entrance side of the dent groove. In such a case, there is a problem in that inserting and drawing operation of an attaching pin with respect to the dent groove becomes troublesome during blade replacement and the operation cannot be performed easily. Furthermore, in a case where the inserting and drawing operation is repeatedly performed with a wiper arm formed of a resin material, it is assumed that the dent groove is worn or damaged. Accordingly, there is an apprehension that use of the wiper unit becomes impossible and the whole wiper unit must be replaced, thus causing a problem. These problems are solved by the present invention.

Disclosure of the Invention

In the circumstances as described above, the present invention is created with the aim of solving the above problems and provides a wiper unit constructed by detachably and rotatably supporting a connecting shaft, which is provided on a blade for wiping a window surface, on an attaching groove provided on the front end of a wiper arm, wherein

as the attaching groove, a groove inner portion having a large diameter and a groove entrance portion having a width narrower than the said groove inner portion are formed and the posture of the attaching groove and the connecting shaft is changed to a connected posture where a coming-off prevention is carried out from the groove entrance portion and to an attaching and detaching posture where entry and exit can be freely carried out from the groove entrance portion.

In particular, the connecting shaft is supported on the blade so as to be slidable in the direction of shaft rotation, a large diameter portion and a small diameter portion are formed by a chamfered portion formed on the outer circumference, and based on making the connecting shaft slide in the direction of shaft rotation by operating an adjusting member which is integrally formed on the connecting shaft end portion, the posture is changed.

In addition, by externally fitting, so as to be slidable in the direction of shaft rotation, a cylindrical sliding portion having a chamfered portion formed on the outer circumference thereof to the stationary shaft which is integrally fixed to a blade, a large diameter portion and a small diameter portion are formed to the connecting shaft, and based on the slide of the cylindrical sliding portion in the direction of shaft rotation, the posture is changed.

Furthermore, the connecting shaft is integrally fixed to the blade, a large diameter portion and a small diameter portion are constructed by a chamfered portion formed on the outer circumference, and based on changing the attaching groove in posture by turning the wiper arm with respect to the blade, the posture is changed.

Still furthermore, the connecting shaft is attached to the blade, a long concave groove is formed on the outer circumference in the shaft direction, and by rotating the connecting shaft in a condition where the groove entrance portion is fitted with the said dent groove, the attaching and detaching posture, which enables free entrance and exit with respect to the groove inner portion, is produced.

Moreover, herein, the groove width of the groove entrance portion of the attaching groove is made slightly smaller than the inside diameter of the groove inner portion, while the connecting shaft comprises a stationary shaft which is integrally fixed to the blade and a stopper pin which prevents the stationary shaft, which is internally fitted to the groove inner portion, from coming off at the groove entrance portion, and the attaching groove and the connecting shaft are changed posture based on attachment and detachment of the stopper pin.

Brief Description of Drawings

Fig. 1 is an overall front view of the wiper unit in that a first embodiment has been carried out.

Fig. 2 is a front view of the major part in that a first embodiment has been carried out.

Fig. 3 is a plan of the major part in that a first embodiment has been carried out.

Fig. 4(A) is a front view of the spacer, and Fig. 4(B) is a section along A-A of Fig. 4(A).

Fig. 5 is an explanatory view showing a condition where the attaching groove and the connecting shaft is connected.

Fig. 6(A) and Fig. 6(B) are explanatory views each showing a condition where the attaching groove and the connecting shaft are connected.

Fig. 7 is a front view of the major part in that a second embodiment has been carried out.

Fig. 8 is a plan of the major part in that a second embodiment has been

carried out.

Fig. 9 is a front view of the major part in that a third embodiment has been carried out.

Fig. 10 is a plan of the major part in that a third embodiment has been carried out.

Fig. 11 is a front view of the major part in that a fourth embodiment has been carried out.

Fig. 12 is a plan of the major part in that a fourth embodiment has been carried out.

Fig. 13 is a front view of the major part showing the attaching groove and connecting shaft in that a fifth embodiment has been carried out.

Fig. 14 is an action explanatory view showing a condition of connection in that a fifth embodiment has been carried out.

Best Mode for Carrying Out the Invention

Now, a first embodiment of the invention will be described with reference to the drawings.

In the drawings, 1 denotes a wiper arm made of a resin and the wiper arm, with the base end thereof fixed on a pivot shaft P which is provided on a vehicle main body, performs reciprocative wiping swings with the pivot shaft P as one body. And a blade 2 is rotatably and detachably attached (supported) on the front end portion of the wiper arm 1, which will be described later.

Namely, on the front end portion of the wiper arm 1, an attaching groove 3 whose lower side (the blade 2 side) is opened is formed in a condition where

the groove inclines gradually toward the arm front end side on the lower side. A groove inner portion 3a located on the groove inner side of the said attaching groove 3 is formed into an inside cylindrical shape having a diameter R, while a first groove edge 3b on one side (front end side of the arm) which continues from the said attaching groove 3a is formed in a liner shape so as to coincide with a tangent line along the direction of the above-described inclination from the groove inner portion 3a. On the other hand, a second groove edge 3c on the other side (base end side of the arm) is formed so that the position thereof shifts to the front end side beyond the position of the tangent line along the direction of the above-described inclination, and thus the groove width S of a groove entrance portion 3d is set to be smaller than the diameter R ($R > S$) and the dovetail groove shape is provided when the groove is viewed from the side.

On the other hand, the blade 2 consists of members such as a primary lever 4 and a secondary lever 5 made of a resin, a blade rubber 6 and the like, and an attaching bracket 7, which is formed so as to surround the periphery of the primary lever 4, is fixed at the center portion in the longitudinal direction of the primary lever 4. Between right and left attaching edges 7a formed on the attaching bracket 7, a columnar fixed shaft 8, whose diameter is set to be X which is smaller than the diameter R of the groove inner portion 3a of the attaching groove by A ($R = A + X$), is fixedly fitted.

In addition, 9 denotes a spacer which, together with the fixed shaft 8, constructs a connecting shaft J of the present invention by being incorporated into the fixed shaft as described later. The spacer 9 is formed of a resin

material and provided with a lever portion 9a which is adjacent to at least one attaching edge 7a of the attaching bracket 7 and a cylindrical sliding portion 9b which is formed on the base end portion of the said lever portion 9a in a protruded manner and fitted to the fixed shaft 8 so as to be slidable in the direction of shaft rotation. Then, the spacer 9 turns (slides) around the sliding portion between the fixed shaft 8 and cylindrical sliding portion 9b as a turning fulcrum and is structured so that the swinging posture can be changed between a stand-up posture where the front end of the lever portion 9a is protruded from the attaching bracket in a stand-up manner and a collapsed posture where the front end of the lever portion 9a is stored in the attaching bracket 7. Furthermore, the cylindrical sliding portion 9b has a cylindrical shape having an inner diameter X which is set to be the same as the diameter (outer diameter) of the fixed shaft 8 and an outer diameter R which is set to be the same as the diameter (inner diameter) R of the groove inner portion 3a of the attaching groove, and the thickness of the cylindrical sliding portion 9b is set to have a dimension of $A/2$.

Then, an opening 9c having a dimension Y which is narrower than the diameter X of the fixed shaft 8 ($X > Y$) is formed by notching on the cylindrical sliding portion 9b, and positional settings thereof are such that the outer circumference of the fixed shaft 8 is approximately in contact with an imaginary straight line L that connects both edges 9d of the said opening 9c with each other (that is, it may exactly be in contact with the imaginary straight line L or may slightly be deviated therefrom within a permissible range.) Herein, the

outer circumference of the fixed shaft 8 is approximately in contact with the imaginary line L which is set by the opening 9c of the cylindrical sliding portion 9b and the fixed shaft 8 does not easily come off from the cylindrical sliding portion 9b, and thus the fixed shaft 8 and spacer 9 are incorporated with each other in a coming-off preventive manner. Then, in such an incorporated state, a chamfered portion 9e, which is substantially based on the opening 9c of the cylindrical sliding portion 9b, is formed (created) on the outer circumference of the connecting shaft J, a larger diameter portion having an outer diameter R and the outer diameter at the said chamfered portion 9e, that is, a smaller diameter portion which is perpendicular to the imaginary straight line L and passes through the shaft core of the fixed shaft 8 are formed, and the dimension of the smaller diameter portion is set to have a diameter T which approximately coincides with the groove width S of the groove entrance portion 3d or is smaller than the same ($T \leq S$).

Then, the connecting shaft J is set so that when the lever portion 9a is brought into the collapsed posture, the opening 9c (the chamfered portion 9e) faces to the groove entrance portion 3d side of the attaching groove 3 and when the lever portion 9a is brought into the stand-up posture, the opening 9c faces to the side opposed to the first groove edge 3a of the attaching groove 3. In addition, in a case of the construction where the imaginary straight line L is exactly in contact with the outer circumference of the fixed shaft 8 or the construction where the outer circumference of the fixed shaft 8 is slightly protruded, the sum of the outer diameter X of the fixed shaft 8 and the thickness

09937626-110801

09937626-110801

A/2 of the cylindrical sliding portion 9b is equivalent to a smaller diameter T ($X + 1/2A = T$), and the dimension of the smaller diameter T is set, as mentioned before, to have a diameter which approximately coincides with the groove width S of the groove entrance portion 3d or is smaller than the same ($T \leq S$).

On the other hand, in the lever portion 9a, a through hole, which leads to the cylinder hole of the cylindrical sliding portion 9b and the opening 9c, is formed and a guide groove 9f, which is provided so as to open toward the same direction as the attaching groove 3a when the lever portion 9a is in the collapsed posture, is formed so as to lead to the above-described through hole. The groove width of the guide groove 9f is set so as to gradually widen toward the lower end (the side of the blade 2 when the lever portion 9a is in the collapsed posture).

Then, the spacer 9 is previously incorporated into the blade 2, which has not been attached to the wiper arm 1 yet, and for incorporation thereof, the groove end portion of the guide groove 9f is held against the fixed shaft 8 and in this state, the lever portion 9a is then pressed down, whereby the cylindrical sliding portion 9b is fitted and attached onto the fixed shaft 8 in a forcibly fitted manner. Thus, the spacer 9 is incorporated in the fixed shaft 8 in a state where it is prevented from coming off in the outer diameter direction and set so that the connecting shaft J having the chamfered portion 9e formed on the outer circumference thereof is constructed.

In such a construction, procedures for attaching and detaching the blade 2 to and from the wiper arm 1 will now be described.

First, when attaching the blade 2, the spacer 9 is incorporated in the fixed shaft 8 of the blade 2, which is referred to a connecting shaft J having the chamfered portion 9e formed on the outer circumference thereof. Then, the lever portion 9a of the spacer 9 is brought into a stand-up posture and set so that the chamfered portion 9e (the opening 9c of the cylindrical sliding portion 9b) faces to the side of the first groove edge 3b of the wiper arm attaching groove 3. Then, as shown in Fig. 5, the spacer thus set is approximated to the groove entrance portion 3d of the wiper arm attaching groove 3 and the chamfered portion 9e of the connecting shaft J and the liner first groove edge 3b of the attaching groove are opposed to each other. In this state, the smaller diameter portion of the connecting shaft J having a small diameter T is opposed to the groove entrance portion 3d having a groove width S which is equal to the small diameter T or is greater than the same, and a setting is provided so that the connecting shaft J is inserted along the first groove edge 3b (the position shown by the imaginary lines of Fig. 6(A)) and then inserted while the position being shifted toward the base end side of the wiper arm 1, whereby as shown by the solid lines of the Fig. 6(A), the connecting shaft can be fitted with the groove inner portion 3a. Thus, a setting is provided so that when the lever portion 9a is brought into a stand-up posture, the connecting shaft J can be fitted to the groove inner portion 3a by only an operation to insert (only to stick) the connecting shaft into the attaching groove 3, and the relationship between the attaching groove 3 and connecting shaft J in such a condition corresponds to an attaching and detaching posture of the present

invention.

In this condition, when the lever portion 9a is rotated by substantially 90° , brought into a collapsed posture, and stored in the attaching bracket 7, as shown in Fig. 6(B), the connecting shaft J then changes into a state where the chamfered portion 9e faces to the side of the groove entrance portion 3d. When the said state is provided, the connecting shaft J is prevented from coming off from the attaching groove 3, whereby the blade 2 is swingably connected to the wiper arm, and the relationship between the attaching groove 3 and connecting shaft J in this state corresponds to a connected posture of the present invention. In this state of incorporation, the lever portion 9a is fixed to the front end portion of the blade 2, whereby the spacer 9 is set so as to be integrated into the wiper arm 1 side (attaching groove 3 side).

In addition, wiping-off operation for the window surface are performed by the blade 2 in this state. At this time, since curvature exists on the window surface, the blade 2 performs wiping-off while minutely swinging with respect to the wiper arm 1 and on the other hand, the wiper arm is urged toward the window surface side by an urging spring (which is not illustrated). Therefore, smooth sliding is required at the portion where the attaching groove 3 and the connecting shaft J are connected and it becomes necessary for the said smooth sliding to secure a large area where one makes contact with the other. In addition, since the spacer 9 is integrated into the attaching groove 3 side, when the blade 2 swings, sliding is performed between the inner circumferential surface of the spacer cylindrical sliding portion 9b and fixed shaft 8. As a

When the blade 2 in the connected condition is detached from the wiper arm 1, the lever portion 9a of the spacer 9 in the connected posture is brought into the stand-up posture and the chamfered portion 9e of the connecting shaft J is opposed to the first groove edge 3b, thus an attaching and detaching posture is produced where the smaller diameter portion having a small diameter T of the connecting shaft J is opposed to the groove entrance portion 3d. In this state, by drawing out (extracting) the connecting shaft J of the blade 2 while shifting the same toward the front end side of the wiper arm 1, the connection between the connecting shaft J and the attaching groove 3 are released, thus the blade 2 can be detached.

In the structure as described above, for attaching and detaching the blade 2 to and from the wiper arm 1, the lever portion 9a of the spacer 9 incorporated in the fixed shaft 8 of the blade 2 is brought into a stand-up posture and the chamfered portion 9e of the connecting shaft J (the opening 9c of the cylindrical sliding portion 9b) is faced toward the first groove edge 3b side of the wiper arm attaching groove 3 and an attaching and detaching posture is produced. In this state, as mentioned before, the smaller diameter portion having a small diameter T which can be inserted in the groove width S of the groove entrance portion 3d of the attaching groove 3 is opposed to the connecting shaft J, attachment and detachment between the connecting shaft J and attaching groove 3 can be easily performed by only inserting and drawing out the shaft, and no fitting load acts on the attaching groove 3 and the connecting shaft J. Consequently, operations for attaching and detaching the

blade 2 to and from the wiper arm 1 becomes easy, while the blade 2 in an attached condition is securely attached to the wiper arm 1, thereby improving workability during replacement of the blade 2. In addition, since no load acts on the attaching and detaching operation, even if a wiper arm 1 made of resin is used, no defect exists such that the attaching groove 3 is worn, durability of the product can be improved, and reliability thereof can be enhanced.

Moreover, herein, when the wiper arm 1 and the blade 2 are connected, a setting is provided such that when the attaching groove 3 and the connecting shaft J are brought in the connected posture, the chamfered portion 9e is opposed to the groove entrance portion 3d, that is, a setting is provided such that the spacer opening 9c is opposed to the groove entrance 3d of the attaching groove, and furthermore, the spacer 9 is incorporated in the wiper arm 1 side. Therefore, as a slight swing of the blade 2, sliding movement is performed in response to a contact area which is widely secured between the spacer cylindrical sliding portion 9b and the fixed shaft 8 and stable swings can be performed. Moreover, the pressure force by the urging spring on the wiper arm 1 side acts on the widely secured sliding surface but does not act on the chamfered portion 9b and spacer opening 9c, therefore the cylindrical sliding portion 9b effectively functions as a bearing and the swinging actions of the blade 2 can be smoothly performed. In this case, if the blade 2 is made to swing counterclockwise by approximately 90° with respect to the wiper arm 1, the chamfered portion 9e of the connecting shaft J is opposed to the first groove edge 3b of the attaching groove without operation of the spacer lever

09037626.110501

portion 9a and, as a result, the connecting shaft J comes off from the attaching groove 3. However, herein, the counterclockwise swing of the blade 2 is restricted so as not to be carried out by approximately 90° by bringing the primary lever 4 on the blade 2 side into contact with the wiper arm 1. Accordingly, for example, even in a case where the wiper arm 1 lying on the window surface is raised and the blade 2 is made to swing during a car wash, a defect such that the blade unexpectedly comes apart from the wiper arm 1 can be securely prevented. In addition, during the clockwise swing of the blade 2, the blade 2 does not come apart from the wiper arm 1.

Needless to say, the present invention is not limited to the above-described embodiment, and as mentioned before, a construction may also be employed, wherein the connecting shaft on which the chamfered portion is formed is fixed to the blade as one body and the wiper arm is made to turn (swing) so that the posture of the attaching groove can be changed with respect to the said fixed connecting shaft. In this case, the positional relationship between the chamfered portion of the connecting shaft and the groove entrance portion of the attaching groove is important, and as a matter of course, a setting is provided so that the attaching groove and connecting shaft maintain the connected posture within the swinging range of the wiper arm and blade and change into an attaching and detaching posture based on a swing exceeding the said swinging range.

In addition, a construction such as a second embodiment shown in Figs. 7 and 8 may also be employed. Namely, a connecting shaft 10 of the second

embodiment has an outer diameter equivalent to the inner diameter R of the groove inner portion 3a of the attaching groove 3 and a chamfered portion 10a is provided on the outer circumference, whereby a smaller diameter portion having a diameter which is equal to the groove width S of the groove entrance portion 3d or equivalent to the diameter T that is smaller than the groove width S. And such connecting shaft 10 is supported on the attaching bracket 7 of the blade 2 side so as to be slidable in the direction of shaft rotation. A pincher (which corresponds to an adjusting member of the present invention) 10b is formed on one end portion of the connection shaft 10 as one body. The pincher 10b is arranged so as to be exposed outside the attaching bracket attaching edge 7a, the connecting shaft 10 can be slid in the direction of shaft rotation by turning and operating the pincher 10b, thus the postural relationship between the attaching groove 3 and connecting shaft 10 can be changed into a connected posture and an attaching and detaching posture. Furthermore, a posture retaining means (which is not illustrated) is releasably provided in the pincher 10 and retains the connecting shaft 10 in a connected posture. Thus, in a case where the blade 2 is replaced, the posture retaining means is released and the pincher 10b is turned so as to produce an attaching and detaching posture, whereby making it possible to easily detach the blade 2. And, advantages thereof are the same as those of the first embodiment.

Now, a third embodiment of the present embodiment shown in Figs. 9 and 10 will be described. On the attaching groove 3 of the present embodiment, a groove entrance portion 3d having a groove width M slightly

09937626 .110801

smaller in diameter than the inner diameter R of the groove inner portion 3a is formed. Therefore, in order to make the attaching groove 3 support a cylindrical fixed shaft 11 having an outer diameter which is the same as the inner diameter R of the groove inner portion 3a, fitting and supporting can be performed by light press fitting. Since the fixed shaft 11 in such a lightly press-fitted condition can be easily fitted into the attaching groove 3, coming-off thereof is also easy, and such a condition corresponds to the attaching and detaching posture of the present invention.

On the other hand, 12 denotes a stopper pin and the stopper pin 12 can be formed by turning up and bending a resilient steel material and a stopper portion 12a which is one of the turned-up portions is urged in the direction where the turned-up portions come close to each other. Then, the stopper pin 12 is attached by inserting it from the front end side of the wiper arm 1 while forcibly expanding the stopper portion 12a, and the stopper portion 12a, which penetrates through a rib 3e formed on the attaching groove 3, is brought into contact, in a pressured manner, with the outer circumference of the fixed shaft 11, which is exposed from the groove entrance portion 3d of the attaching groove 3. Thereby, the stopper portion 12a in a condition where an urging force is applied is brought into contact with the fixed shaft 11 and prevents the fixed shaft 11 from coming off from the attaching groove 3. Thus, the connecting shaft comprises the fixed shaft 11 and the stopper pin 12, and the condition where the stopper pin 12 is attached and coming-off is prevented corresponds to the connected posture of the present invention.

Then, similar to the third embodiment, a connected posture is produced between the attaching groove 3 and the fixed shaft 11 by attaching a stopper pin 13. The stopper pin 13 of the present embodiment is formed of a plate-like steel material and inserted from the front end side of the wiper arm 1 via the rib 3e, thus the inserted front end portion prevents the fixed shaft 11 which faces to the groove entrance portion 3d from coming off, and the stopper pin 13 is fixed to the wiper arm 1 by rotating to engage an engaging projection 13a, which is bent and formed on the front end portion of the stopper pin 13, with the rib 3b after setting the stopper pin 13. Such a condition where the stopper pin 13 prevents the fixed shaft 11 from coming off corresponds to the connected posture between the attaching groove 3 and connecting shaft (fixed shaft 11 and stopper pin 13) according to the present invention.

By thus constructing, based on the attaching and detaching of the stopper pin 13, the relationship between the attaching groove 3 and the fixed shaft 11 is changed into the connected posture and the attaching and detaching posture. Similar to the first embodiment, also in this case, blade replacing operations can be simplified and construction where no load is applied to the attaching groove 3 can improve durability, while the wiper arm 1 and the blade 2 can be securely attached.

Furthermore, a fifth embodiment will be described based on Figs. 13 and 14.

An attaching groove 14 formed on the wiper arm 1 of the preset embodiment is formed similarly to that of the above-described embodiments.

That is, an attaching groove 14a located on the groove inner side is formed in an inside cylindrical shape having a diameter R and the said inside cylindrical shape is closer to a cylinder than a semi-cylinder by a portion equivalent to the chord H . Moreover, a first groove edge 14b which leads to a groove inner portion 14a of the attaching groove coincides with a tangent line at one end portion of the groove inner portion 14a, a second groove edge 14c on the other side is formed from the other end portion so as to expand and open obtusely, whereby the groove width S of a groove entrance portion 14d becomes smaller than the inner diameter R of the groove inner portion 14a ($R > S$), and thus the attaching groove 14 has a dovetail groove shape when the groove is viewed from the side. At this time, the chord H is set so as to become smaller than the groove width S of the groove entrance portion 14d ($H < S$).

On the other hand, a connecting shaft 15 has a columnar shape having an outside diameter approximately equal to the inner diameter R of the groove inner portion 14a of the attaching groove and a long dent groove 15a is formed on the outer circumferential surface in the shaft direction, and the said connecting shaft 15 is attached to the blade 2. The dent groove 15a is formed to have an approximately arc-shaped groove surface, dimensions are set so that the groove width N in the circumferential direction becomes greater than the chord H which corresponds to a portion exceeding a semi-cylinder of the attaching groove 14 ($N \geq H$) and the maximum depth D of the groove depth becomes smaller than the groove width S of the groove entrance portion 14d of the attaching groove 14 ($D \leq S$). Incidentally, the dent groove 15a is not

limited to having an arc-shape as long as it is provided with the groove width of N and the maximum groove depth of D and an appropriate shape, for example, a V-groove, a rectangular groove or the like can be employed.

Then, the connecting shaft 15 on the blade 2 side is held against a connecting shaft dent groove 15a in a condition where a corner portion C of the second groove edge 14c side of the groove entrance portion 14d on the wiper arm 1 side is fitted. In this condition, the connecting shaft 15 is then rotated relatively with respect to the attaching groove 14 (in the direction of arrow P) to change the posture of the dent groove 15a opposed to the corner portion C, while the connecting shaft 15 is shifted toward the groove inner portion 14a side (in the direction of arrow Q), and whereby connection between the connecting shaft 15 and the attaching groove 14 is accomplished. And such a condition where the attaching groove 14 and the connecting shaft 15 are attached and detached while being rotated corresponds to the attaching and detaching posture of the present invention, and furthermore, the connecting shaft 15 is prevented from coming off from the attaching groove 14 by rotating the connecting shaft 15 so that the dent groove 15 reaches to a position shifted from the corner portion C and this posture corresponds to the connected posture of the present invention.

By structure as such, similar to the above-described embodiments, the attaching and detaching operations of the connecting shaft 15 with respect to the attaching groove 14 becomes easy, the replacement operation of the blade 2 becomes easy, and furthermore, no load acts on the attaching groove 14

during the said replacement operation, thus making it possible to improve durability.

In the connected posture where the connecting shaft 15 is incorporated in the groove inner portion 14a in a coming-off preventive manner, as shown in Fig. 14, the dent groove 15a can be set so as to be located at the groove entrance portion 14d. If such a setting is employed, the outer circumferential surface of the connecting shaft 15 slides beyond the whole inner circumferential surface of the groove inner portion 14a in a manner of surface contact.

In terms of the relationship between the attaching groove 14 and connecting shaft 15, as mentioned above, the sliding area therebetween is widely secured and wiping operations are performed with a minute swing between the wiper arm 1 and blade 2 being absorbed. In addition, if curvature of the window surface becomes great in this condition, then the connecting shaft 15 attached on the blade 2 side swings relatively to the wiper arm 1 which is pressed toward the window surface according to the curved window surface, therefore, it is necessary to secure the sliding surface of the connecting shaft 15a to be wider than the sliding surface of the attaching groove 14. However, this cannot be easily carried out in such a construction as the first embodiment where the notch portion is formed on the connecting shaft. Nevertheless, as mentioned before, the groove width N of the dent groove 15a of the connecting shaft 15 is set to be equal to or slightly greater than the chord H and the said chord H is also set to be smaller than the groove width S of the groove entrance

09937626-110501

portion 14d in the present embodiment, whereby the sliding surface of the connecting shaft 15, that is, the outer circumferential surface excluding the dent groove 15a can be secured to be longer than the sliding surface which is set by the groove inner portion 14a. Thus, in the connected posture, even if the sliding surface of the connecting shaft 15 is exposed from the groove inner portion 14a and reaches to the part opposed to the groove entrance portion 14d and then the blade 2 swings in accordance with the curved surface, the swing can be received by the sliding surface of the connecting shaft 15, and consequently, stable wiping operations can also be performed even on a window surface having greater curvature.

Herein, the connecting shaft 15 of the present embodiment is fixedly attached to the attaching bracket 7 of the blade 2 and when the connecting shaft 15 is attached and detached to and from the wiper arm attaching groove 14, the attaching and detaching operation is performed while the posture of the wiper arm 1 or the blade 2 is changed. However, a structure may be employed such that the connecting shaft 15 is slidably incorporated into the attaching bracket 7, and an embodiment of this case can be carried out by providing, for example, a pincher on one end portion in the shaft direction of the connecting shaft 15 so as to protrude outside the attaching bracket 7 and then performing the attaching and detaching operation while rotating the said pincher.

Industrial Applicability

By constructing as such, the connecting shaft can be securely connected to the attaching groove. On the other hand, not only can the

attaching and detaching operations be simplified but also it becomes possible to prevent an attaching and detaching load from being applied to the attaching groove.

WHAT IS CLAIMED IS:

1. A blade attaching structure of a wiper unit having an attaching groove formed on the tip end of a wiper arm and a connecting shaft provided on a blade for wiping a window surface, said connecting shaft detachably and rotatably supported by the attaching groove, wherein

said attaching groove is provided with a groove inner portion having a larger diameter and a groove entrance portion having a width narrower than the groove inner portion, and wherein

the postures of the attaching groove and the connecting shaft are changed between the connected posture where the connecting shaft is prevented from coming off from the groove entrance portion and the attaching and detaching postures where the connecting shaft can freely enter or exit from the groove entrance portion.

2. A blade attaching structure of a wiper unit as set forth in Claim 1, wherein

the connecting shaft is supported on the blade so as to be slidable in the rotational direction of the shaft, the connecting shaft having a larger diameter portion and a smaller diameter portion due to a chamfered portion created on the outer circumference, and wherein

changing postures are accomplished by operating an adjusting member integrally formed on the connecting shaft end portion to make the connecting

shaft slide in the rotational direction of the shaft.

3. A blade attaching structure of a wiper unit as set forth in Claim 1, wherein

the connecting shaft comprises a larger diameter portion and a smaller diameter portion formed by externally fitting a cylindrical sliding portion having a chamfered portion formed on the outer circumference to a fixed shaft integrally fixed to the blade so as to be slidable in the rotational direction of the shaft, and wherein

changing postures are accomplished based on the slide of the cylindrical sliding portion in the rotational direction of the shaft.

4. A blade attaching structure of a wiper unit as set forth in Claim 1, wherein

the connecting shaft is integrally fixed to the blade, said connecting shaft having a larger diameter portion and a smaller diameter portion formed due to a chamfered portion created on the outer circumference, and wherein

changing postures are accomplished based on changing the postures of the attaching groove by rotating the wiper arm with respect to the blade.

5. A blade attaching structure of a wiper unit as set forth in Claim 1, wherein the connecting shaft is attached to the blade, said connecting shaft having a long concave groove on the outer circumference in the axial direction,

and wherein

the attaching and detaching postures enabling free entrance and exit of the connecting shaft with respect to the groove inner portion is produced by rotating the connecting shaft in such a state that the groove entrance portion is fitted in the said concave groove.

6. A blade attaching structure of a wiper unit as set forth in Claim 1, wherein the groove width of the groove entrance portion of the attaching groove is made slightly smaller than the inner diameter of the groove inner portion, while the connecting shaft comprises a fixed shaft integrally fixed to the blade and a stopper pin for preventing the fixed shaft internally fitted to the groove inner portion, from coming off at the groove entrance portion, and the attaching groove and the connecting shaft are changed in posture based on attachment and detachment of the stopper pin.

09/937626 110801

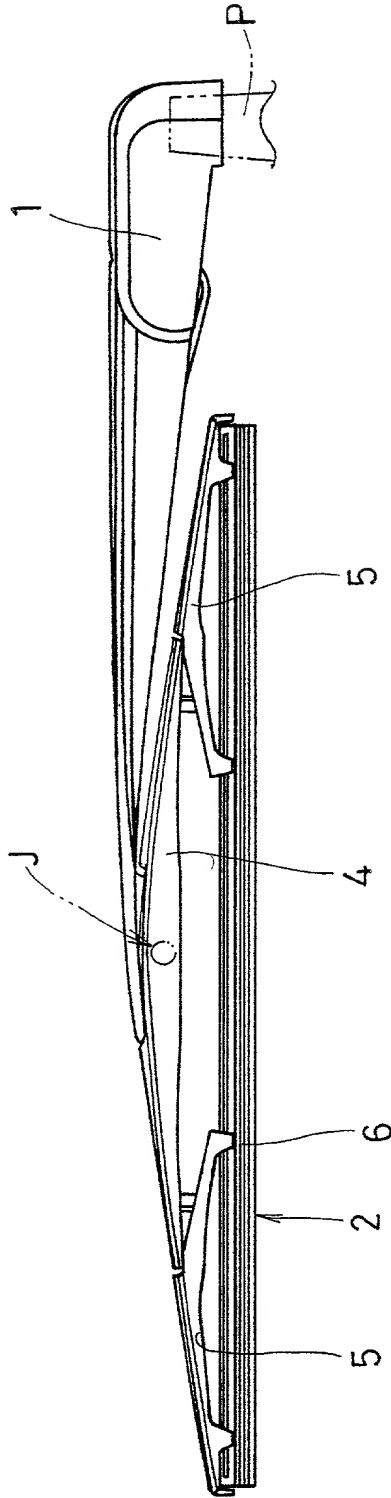


Fig. 1

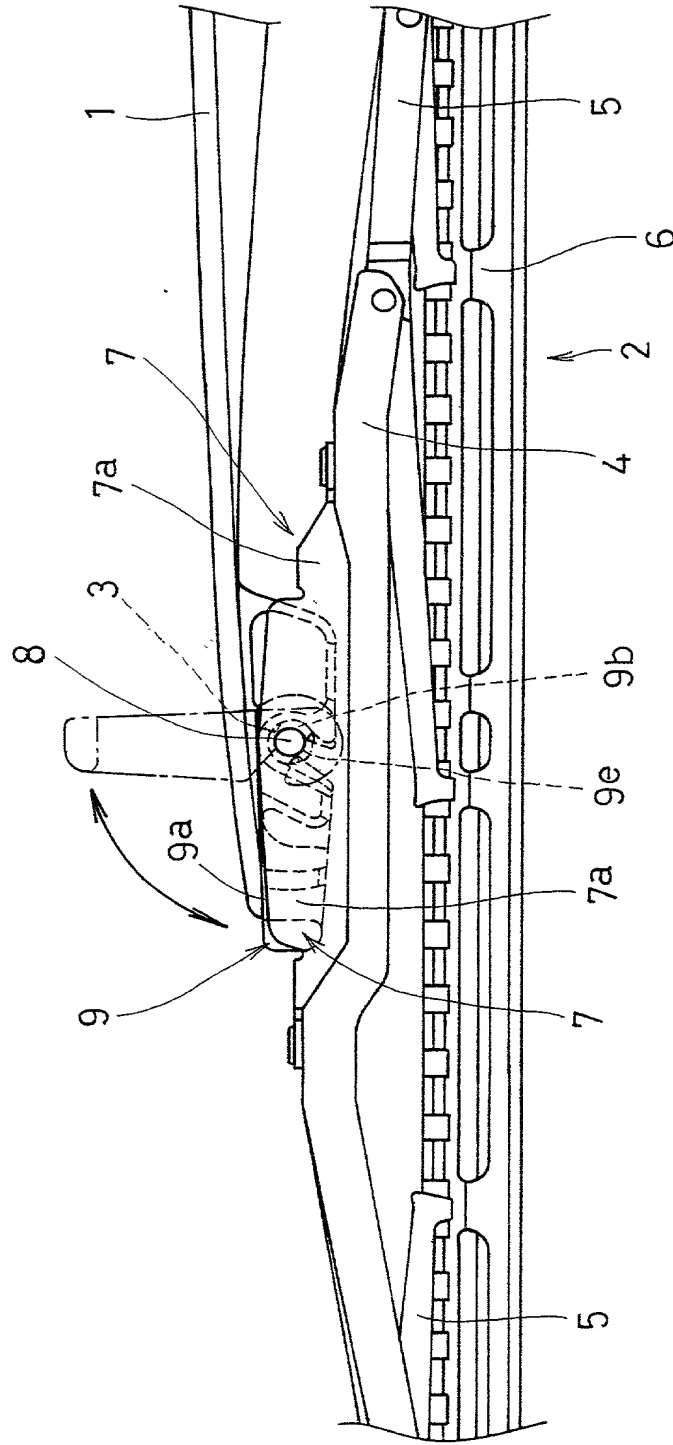


Fig.2


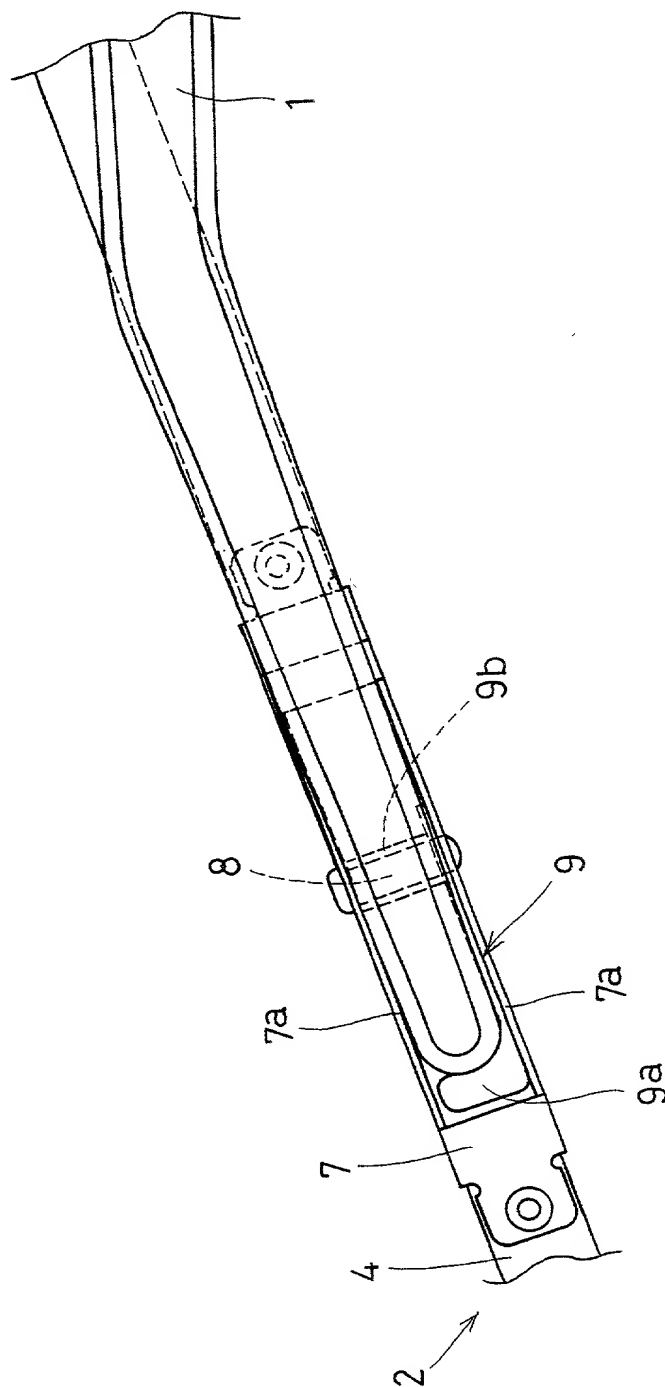


Fig. 3

(A)

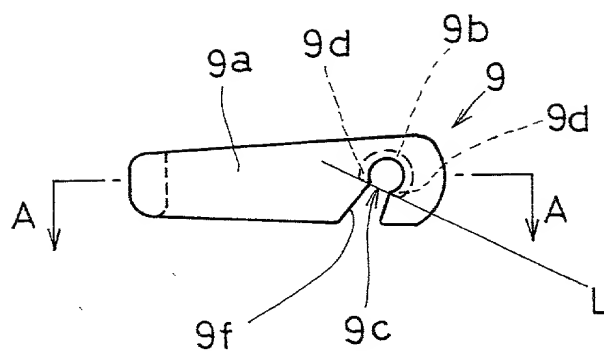

(B)

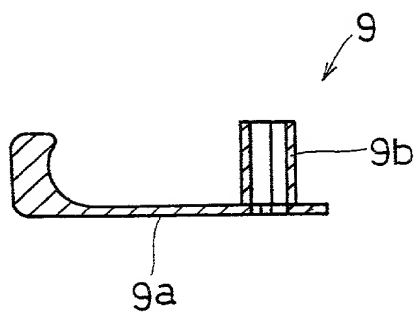


Fig. 4

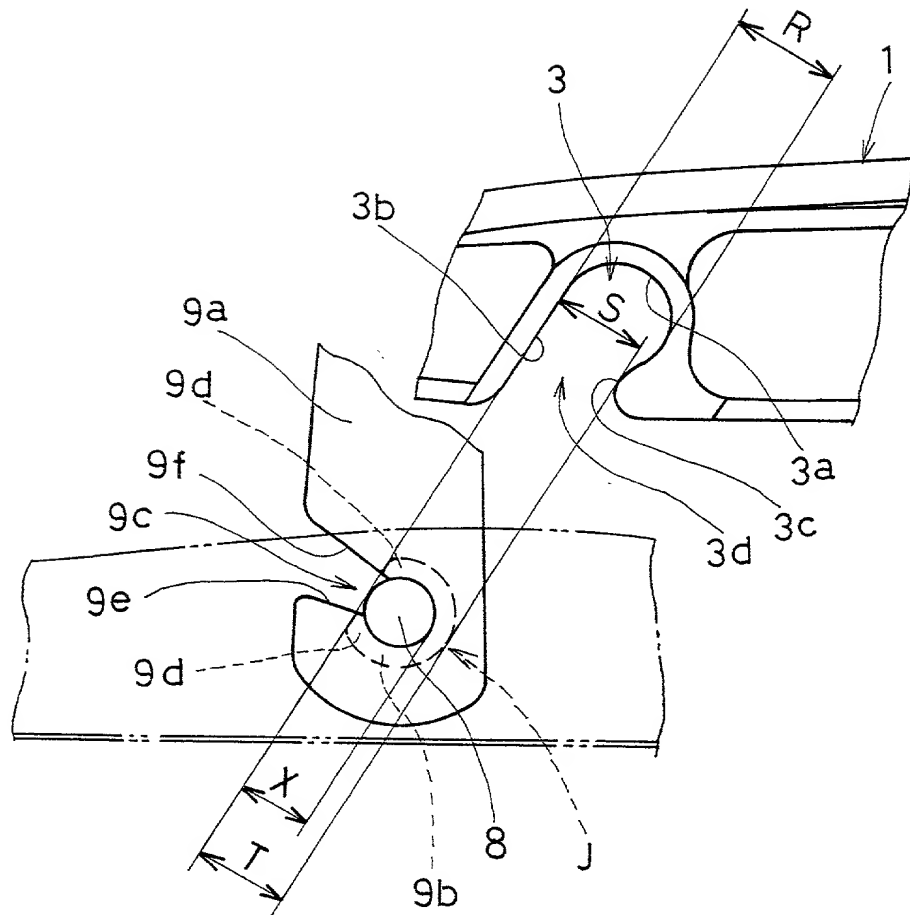


Fig. 5



(B)




Fig. 7

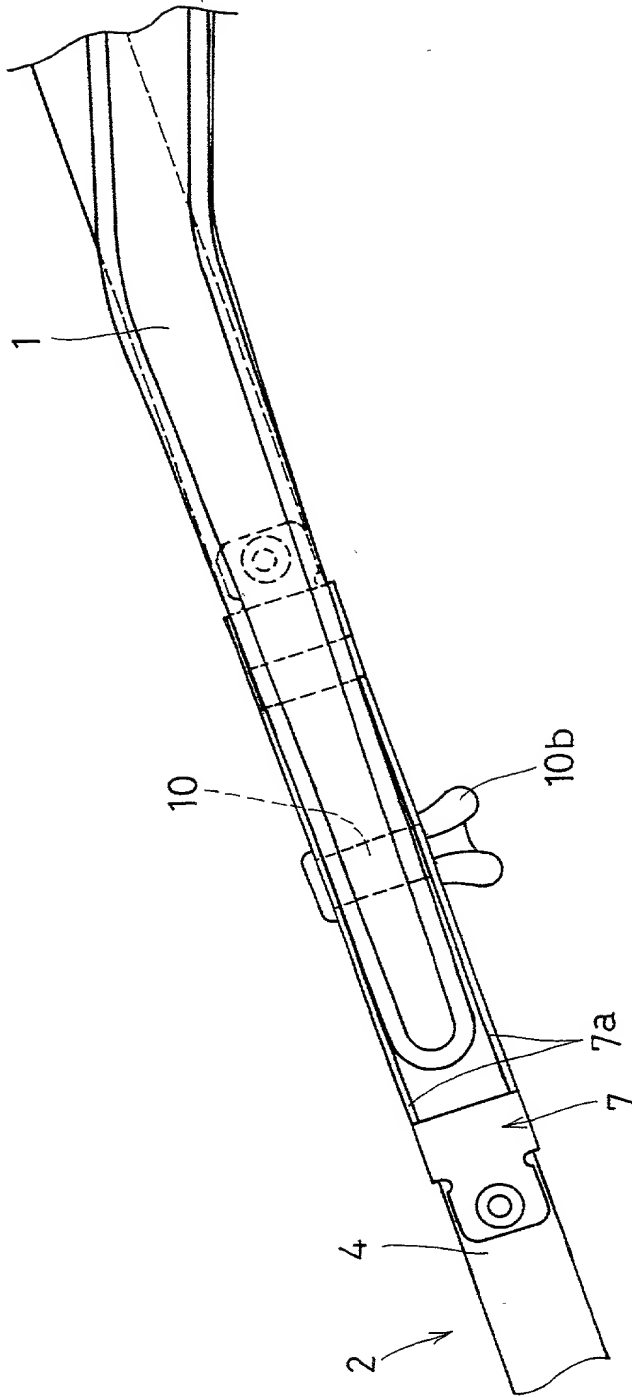


Fig. 8




Fig. 9

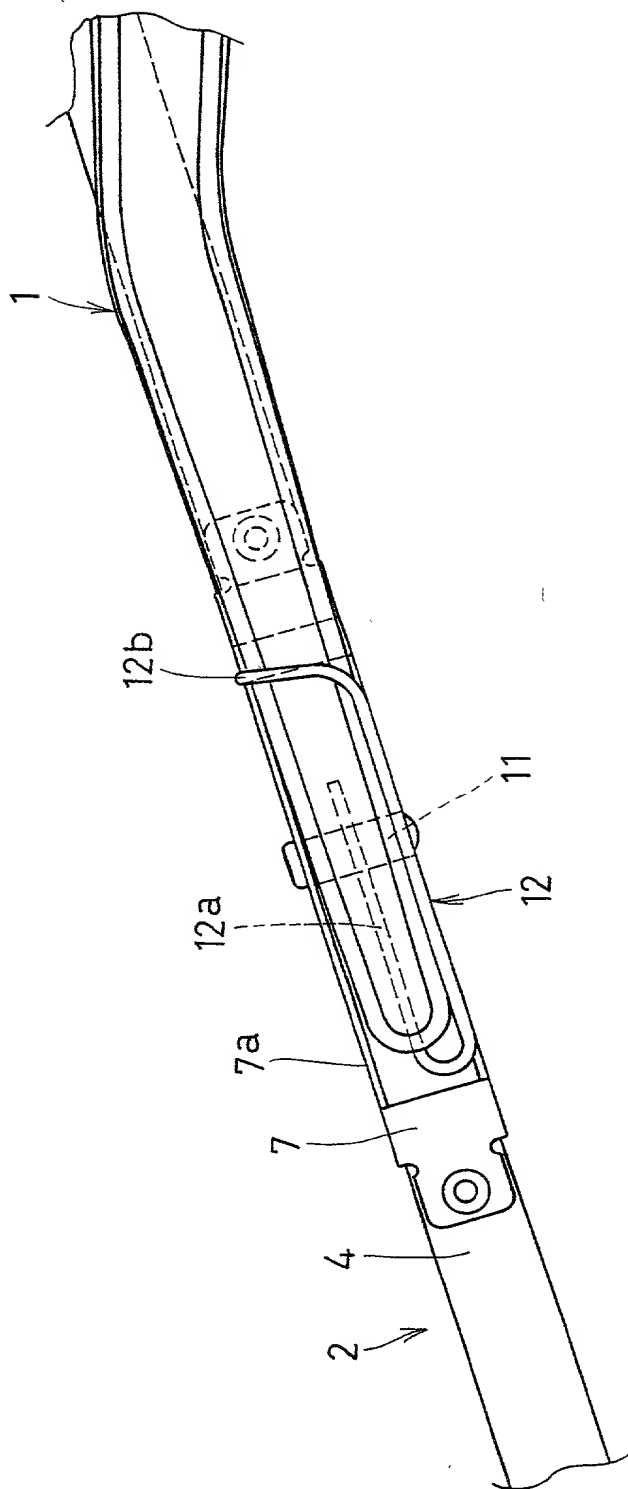


Fig. 10

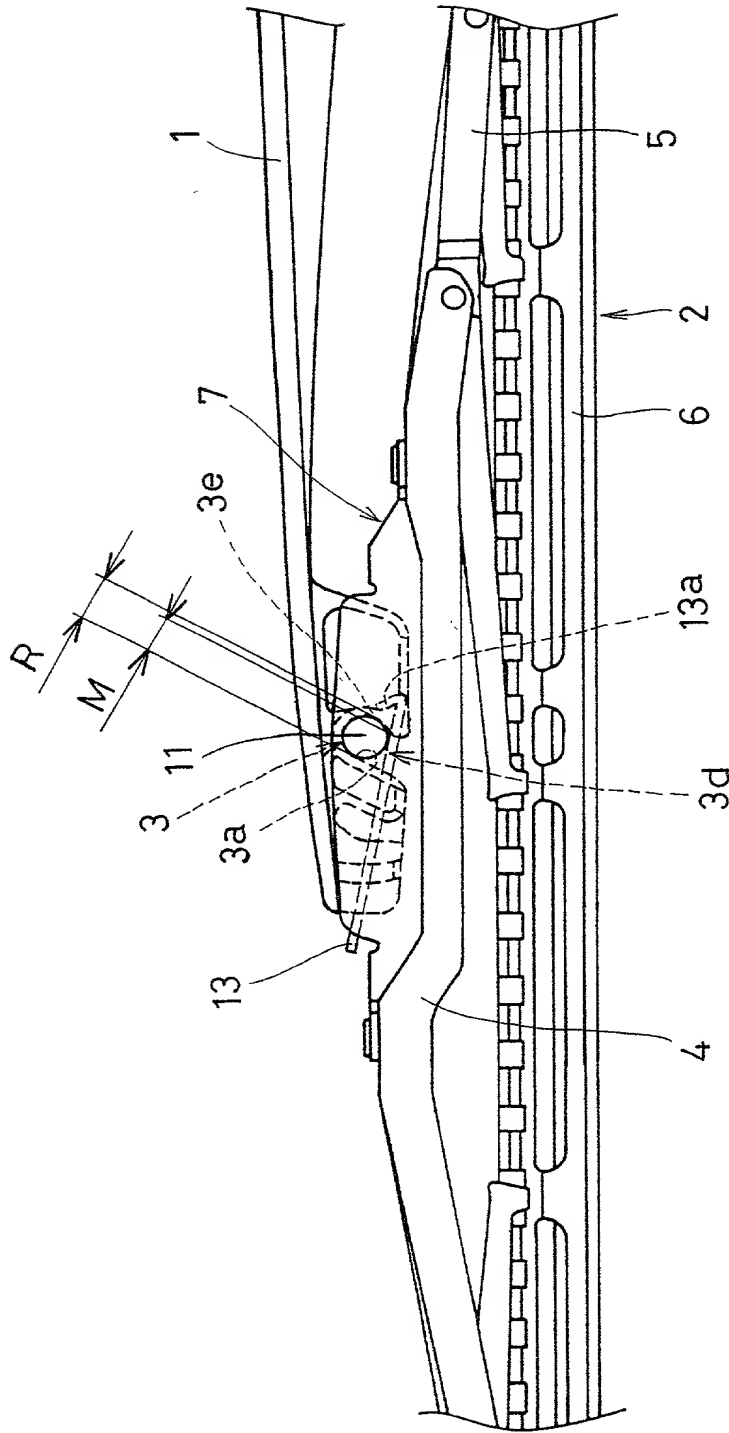


Fig. 1

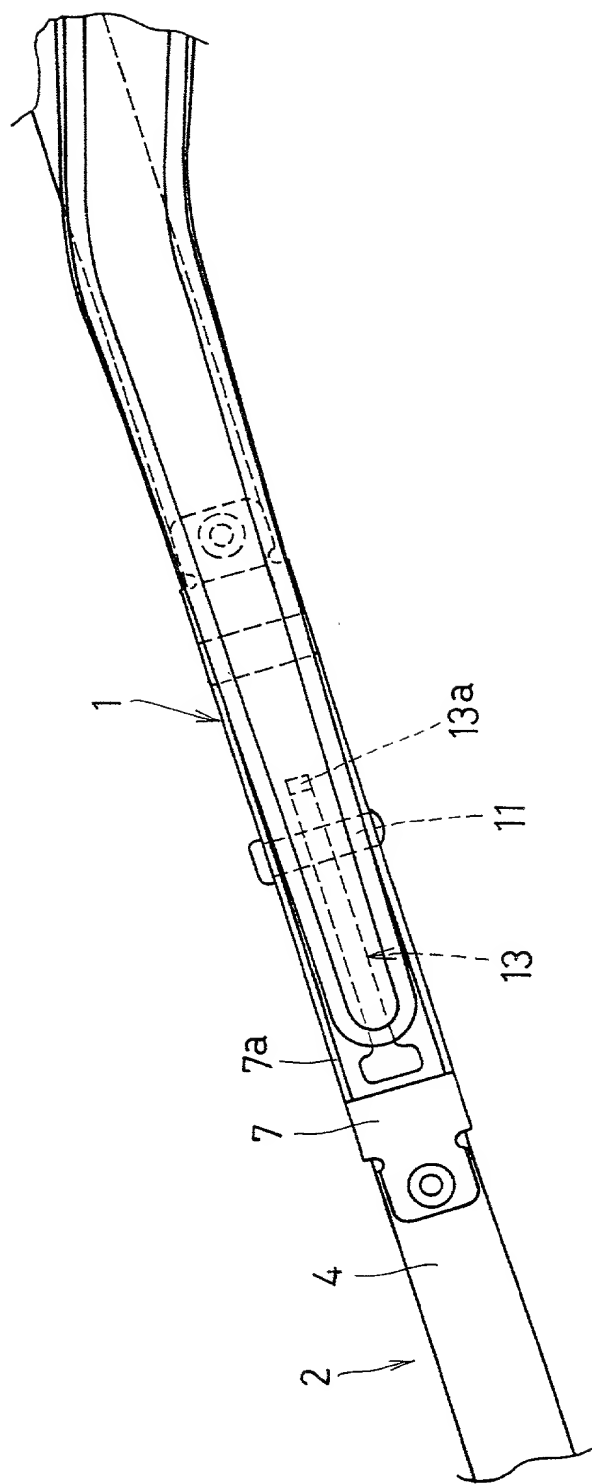


Fig. 12

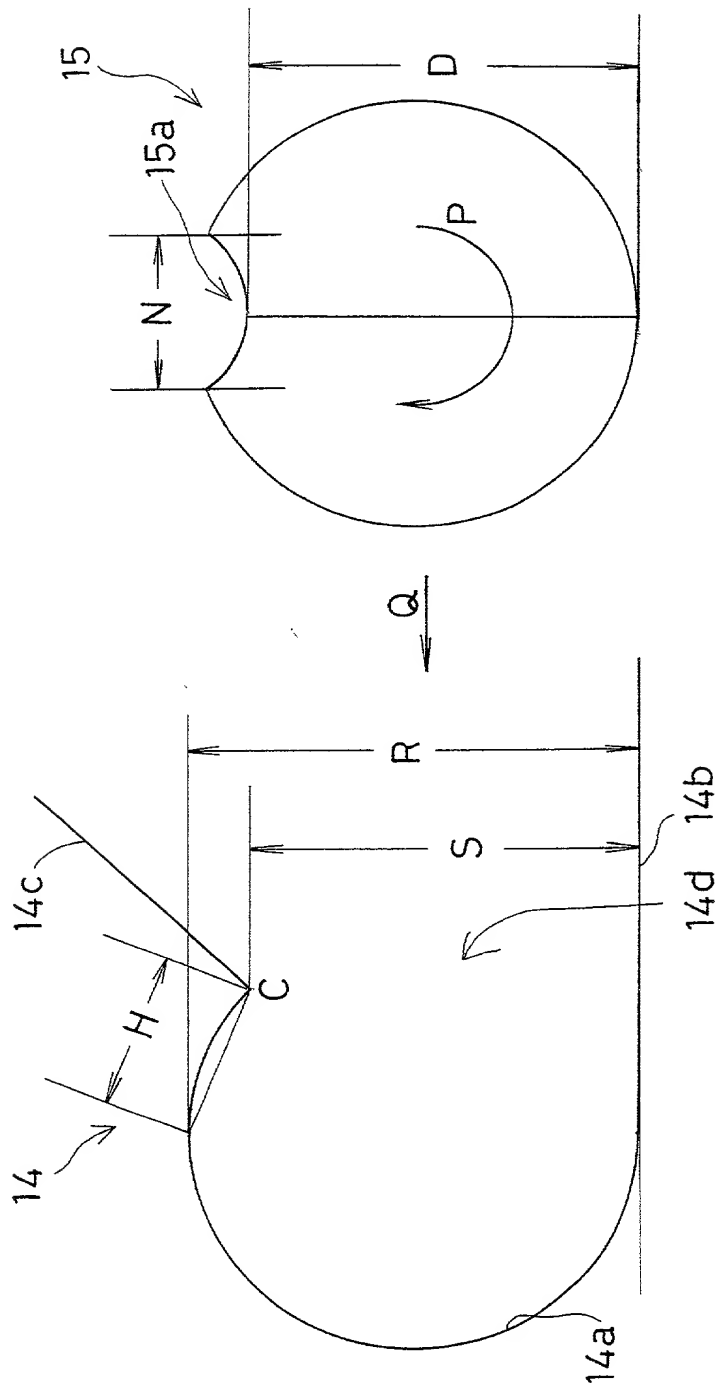


Fig. 13


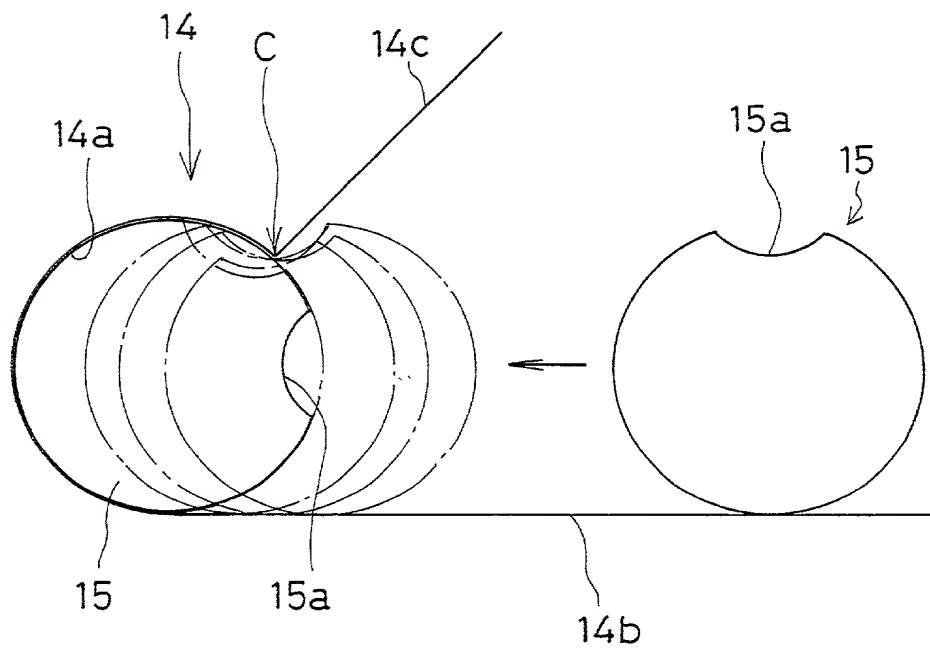


Fig. 1 4



**DECLARATION AND POWER OF ATTORNEY
UNDER 35 USC §371(c)(4) FOR
PCT APPLICATION FOR UNITED STATES PATENT**

I, a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below under my name;

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought, namely the invention entitled: BLADE ATTACHING STRUCTURE OF WIPER UNIT

described and claimed in international application number PCT/JP00/02175 filed April 4, 2000.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) filed by me or my legal representatives or assigns within one year prior to my international application are hereby claimed:

Japanese Patent Application No. 11-103980 filed April 12, 1999

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to my international application, or (b) before the filing date of the above-named foreign priority application(s):

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;
Mario A. Costantino, Reg. No. 33,565; Stephen J. Roe, Reg. No. 34,463;
Joel S. Armstrong, Reg. No. 36,430; Christopher W. Brown, Reg. No. 38,025; and
Richard E. Rice, Reg. No. 31,560.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & BERRIDGE, PLC, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	<i>Typewritten Full Name of Sole or First Inventor</i>	<u>Akira</u>	<u>HAYASHI</u>	<u>NAKAZAWA</u>
		Given Name	Middle Initial	Family Name
2	<i>Inventor's Signature</i>	<u>Akira</u>		<u>Nakazawa</u>
3	<i>Date of Signature</i>	<u>October</u>	<u>17</u>	<u>2001</u>
		Month	Day	Year
	<i>Residence:</i>	<u>Nitta-gun</u>	<u>Gunma-ken</u>	<u>Japan</u>
		City	State or Province	Country
	<i>Citizenship:</i>	<u>Japan</u>		
	<i>Post Office Address:</i>	<u>4104-4, Ohaza-shika, Kasakake-machi, Nitta-gun,</u>		
	<i>(Insert complete mailing address, including country)</i>	<u>Gunma-ken, Japan</u>		

Note to Inventor: Please sign name on line 2 exactly as it appears in line 1 and insert the actual date of signing on line 3.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒
(Discard this page in a sole inventor application)

00037536-110901

1 *Typewritten Full Name
of Joint Inventor*

Yoshinori

MASUDA

Given Name

Middle Initial

Family Name

2 Inventor's Signature:

Yoshinori

Masuda

3 Date of Signature:

October

17,

2001

Month

Day

Year

Residence:

Kiryu-shi

Gunma-ken

Japan

City

State or Province

Country

Citizenship:

Japan

Post Office Address:

Narukami-ryo, 2-3205, Hirosawa-cho, Kiryu-shi,

(Insert complete mailing
address, including country)

Gunma-ken, Japan

1 *Typewritten Full Name
of Joint Inventor*

Given Name

Middle Initial

Family Name

2 Inventor's Signature:

3 Date of Signature:

Month

Day

Year

Residence:

City

State or Province

Country

Citizenship:

Post Office Address:

(Insert complete mailing
address, including country)

1 *Typewritten Full Name
of Joint Inventor*

Given Name

Middle Initial

Family Name

2 Inventor's Signature:

3 Date of Signature:

Month

Day

Year

Residence:

City

State or Province

Country

Citizenship:

Post Office Address:

(Insert complete mailing
address, including country)

1 *Typewritten Full Name
of Joint Inventor*

Given Name

Middle Initial

Family Name

2 Inventor's Signature:

3 Date of Signature:

Month

Day

Year

Residence:

City

State or Province

Country

Citizenship:

Post Office Address:

(Insert complete mailing
address, including country)

Note to Inventor: Please sign name on line 2 exactly as it appears in line 1 and insert the actual date of signing on line 3.

This form may be executed only when attached to the first page of the Declaration and Power of Attorney of the application to which it pertains.

09937636-110301